

Drills

DL07 • ID07



ID07

The DL07 Drill is ideal for drilling holes in wood, metal and masonry. It features instant reverse for high reliability and efficiency in all types of drilling applications.

The ID07 Impact Drill/Wrench delivers impact torque of up to 500 ft lbs (675 Nm). It is capable of breaking loose some of the toughest bolts and nuts. The ID07 can drive wood augers into the hardest salt-cured or creosote-treated poles without reaction torque to the operator.

Features

DL07

- Hyvrevz™ gear-type motor.
- Oversized feathering trigger.
- Increased operator comfort.
- Dual position Assist Handle.
- Built-in reverse check valve.
- Handle coating transmits less heat.

ID07

- Hyvrevz™ gear-type motor.
- Swing-hammer mechanism.
- 7/16 in. hex quick-change chuck or 1/2 in. square drive.
- Built-in reverse check valve.
- Handle coating transmits less heat.

Specifications

	DL07	ID07
Weight	6 lbs (2.7 kg)	7 lbs (3.3 kg)
Length	9 in. (23 cm)	8.5 in. (21.6 cm)
Capacity	1/2 in. Chuck (12 mm Chuck)	7/16 in. or 1/2 in.
Max. Flow	12 gpm (45 lpm)	12 gpm (45 lpm)
Max. Pressure	2000 psi (140 bar)	2000 psi (140 bar)


DL07 Drill Speeds

Speed/Hyd. Flow

350 rpm @ 3 gpm (11.3 lpm)
475 rpm @ 4 gpm (15 lpm)
750 rpm @ 6 gpm (23 lpm)
1000 rpm @ 8 gpm (30 lpm)
1250 rpm @ 10 gpm (38 lpm)



DL07

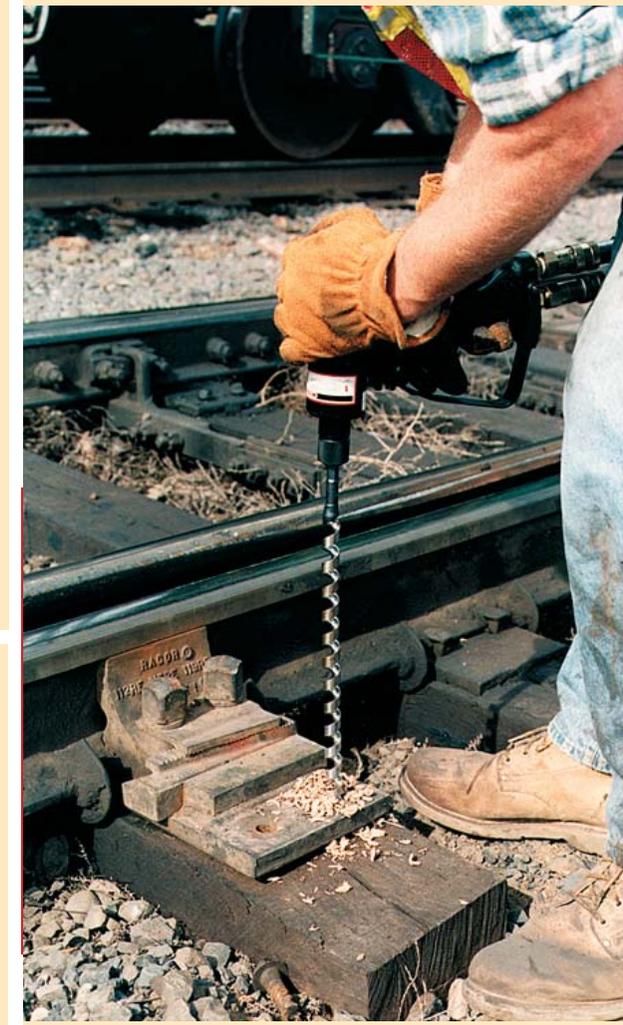

Order Information

DL07550, OC/CC, Dual Spool, 1/2 in. Chuck
DL0755001, OC/CC, Dual Spool, 1/2 in. Chuck, CE
DL07572S, Dual Spool, 5/8 in. Chuck
ID0781001, 7/16 in. Quick Change Chuck, CE
ID07810S, 7/16 in. Quick Change Chuck
ID07815, 7/16 in. Quick Change Chuck
ID07820, 1/2 in. Square Drive
ID0782001, 1/2 in. Square Drive, CE

Included Equipment

Trigger Guard, Assist Handle, Couplers
Trigger Guard, Assist Handle, Couplers
Trigger Guard, Assist Handle, Couplers
Couplers
Couplers
Trigger Guard
Trigger Guard, Couplers
Couplers

DL07

7/16 in. Shank Carbide Tipped Augers

9/16, 11/16, 13/16 in. Dia, 8 in. Twist, 12 in. OAL
9/16, 11/16, 13/16, 15/16, 1-1/16 in. Dia, 12 in. Twist, 16 in. OAL
9/16, 11/16, 13/16, 15/16, 1-1/16 in. Dia, 18 in. Twist, 22 in. OAL
11/16 in. Dia, 32 in. Twist, 36 in. OAL
13/16 in. Dia, 36 in. Twist, 48 in. OAL
13/16 in. Dia, 15 in. Twist, 18 in. OAL

ID07

Adapter, 7/16 Male Hex x 1/2 Male Square

Adapter, 1/2 Female Square x 5/8 Hex QC

Impact Socket Set, 1/2 Sq Drive, 8-Point, Deep Sockets

Includes Vinyl Holder & 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 1, 1-1/16
Lineman's Socket, 13/16, 15/16, 1, 1-1/8