

T23520 Turbocharger Mounting Bolt Torque Kit


All turbocharger mounting bolts on GE Engines require torquing per the maintenance instructions. This kit provides the tools for that practice.

1	T22520 1/2" sq.dr. ratcheting head 30-250 lb.ft. torque wrench
2	T23500 Adapter

T19162 Turbocharger Lifter

This lifter is designed to remove and install all turbochargers on GE Engines. Three turnbuckles are provided to assist leveling the turbocharger.

1	T19162TA Turnbuckle Assembly
2	T13791 Captive Bolt - Grade 8 (4 required)

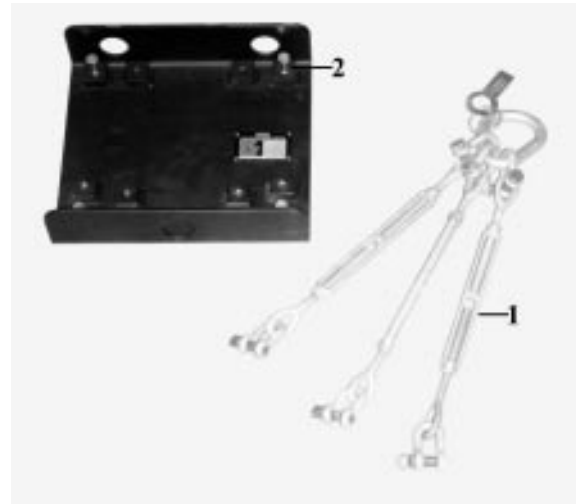

T50370 Turbocharger Transition Section to Exhaust Inlet Casing Wrench

This wrench is used to torque and loosen the socket head cap screws that secure the exhaust manifold section to the turbocharger exhaust inlet casing. The input is a 1/2" female square and the output is a heavy duty 3/8" hex bit.

T22551 Turbocharger Service Cart

This cart was developed to aid the disassembly and assembly of GE Turbochargers. The turbocharger is mounted in the cage and secured with four hold down bolts. The cage is powered by an electric motor and gear that turns 360° in either direction. The motor is operated by a push button and when released a mechanical brake locks the cage in place.

1	T22551 115V 50/60Cy 1 Phase Turbo. Service Cart
2	T22552 230V 50/60Cy 1 Phase Turbo. Service Cart

